




700 FAMILY




Exclusively For
Professionals

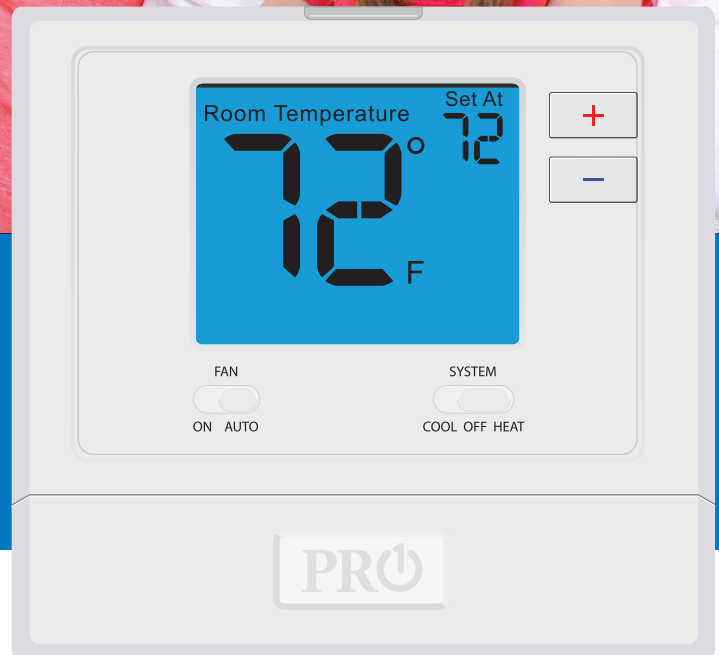

700 FAMILY

Simple. Affordable. Professional.



PRO



7D 7 Day Programmable
5/1/1 5/1/1 Programmable
NP Non-Programmable

Model #	7D	5/1/1	NP	Stages Of Heat	Stages Of Cool	Heat Pump Systems With Auxiliary	Conventional Systems	PTAC Mode	Display Size (square inches)	Filter Change Reminder	Room Temperature Calibration	Adjustable Heat & Cool Temperature Swing	Programmable Fan	Adjustable Setpoint Limits	Auto Changeover	Memory Type (permanent)	Remote Sensor Capable	Outdoor Temperature Sensor Capable	WIFI Ready	Fan Speeds	Warranty (years)	Terminals
T771			NP	0/1	0/1		•	4	•	•	•	•	•	•	•					1	5	R, C, W/Y, G
T755S**	7D	5/1/1	NP	3*	2	•	•	7	•	•	•	•	•	•	•	•	•			3	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O, S1, S2
T755	7D	5/1/1	NP	3*	2	•	•	7	•	•	•	•	•	•	•					3	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T731WO			NP	2	1	•	•	7	•	•	•	•	•	•	•					3	5	R, C, Y, W, O, B, GH, GL
T731W			NP	2	1	•	•	7	•	•	•	•	•	•	•					3	5	R, C, Y, W, O, B, GH, GL
T725	7D	5/1/1	NP	2	1	•	•	4	•	•	•	•	•	•	•					1	5	R, C, Y, W2, WE, G, B, O
T721			NP	2	1	•	•	4	•	•	•	•	•	•	•					1	5	R, C, Y, W2, WE, G, B, O
T715	7D	5/1/1	NP	2	2		•	4	•	•	•	•	•	•	•					1	5	Rh, Rc, C, Y, Y2, W, W2, G, B, O
T705	7D	5/1/1	NP	1	1		•	4	•	•	•	•	•	•	•					1	5	Rh, Rc, C, Y, W, G, B, O
T701i			NP ⁴	1	1		•	4	•	•	•	•	•	•	•			•		1	5	Rh, Rc, C, Y, W, G, B, O
T701			NP	1	1		•	4	•	•	•	•	•	•	•					1	5	Rh, Rc, C, Y, W, G, B, O

⁴ Programming available through the WIFI app
Stages* = 2 Stages For Conventional Heat

** Wired accessories available for T755S
R251S is an indoor remote temperature sensor
R250S is an outdoor remote temperature sensor



The most commonly desired features at a great value with a model for nearly any system.

rev. 2018



1-800-PRO1-559 (776-1559)

PRO
www.pro1iaq.com