

Job Name:	
Tag#	



Submittal Data Sheet

2MXL18QMVJU

2 Port, 1.5-Ton Outdoor Heat Pump



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Outdoor Specifications

Compressor	Hermetically Sealed Swing Type			
Refrigerant	R-410A			
Refrigerant Oil	PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating	
	H	2,150	H	1,963
	M	2,150	M	1,963
	L	1,949	L	1,006
Sound Power Level (dBA)	50 / 51			
Dimensions (H x W x D) (in)	28-15/16 x 34-1/4 x 12-5/8			
Weight (Lbs)	139			

Efficiency

	SEER	EER	HSPF
Non-Ducted	17	12.7	10.3
Ducted	14	10.1	8.2
Mixed	15.5	11.4	9.25

Performance

Cooling (Btu/hr)

Rated	18,000
Operating Range	14°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

Heating (Btu/hr)

Rated	18,900
Operating Range	-13°F – 60°F

Rated Heating Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 47°F DB/43°F WB

Electrical

	208/60/1	230/60/1
System MCA	17.1	17.1
System MFA	20	20
Compressor RLA	15.5	15.5
Outdoor fan motor FLA	.33	.33
Outdoor fan motor W	51	51

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)
RLA: Rated load amps (A) W: Fan motor rated output (W)

Piping


Liquid (in)	¾ x 2
Gas (in)	3/8 x 1, ½ x 1
Drain (in)	5/8
Max. Interunit Piping Length (ft)	164
Max. Interunit Height Difference (ft)	49.25
Chargeless (ft)	98.4
Additional Charge of Refrigerant (oz/ft)	.21

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Creation Date: June 2017

Page 1 of 5



Page 2 of 5

Included	Part Number	Description
	DACA-WB-3	Mounting Bracket
	KEH063A4E	Drain Pan Heater 2/3/4MXS & 2/3MXL
	KPW063A4	Air Adjustment Grille
	KKG063A42	Back protection wire net
	KKG063A43	Side protection wire net
	KPS063A41	Snow hood (intake side plate)
	KPS063A44	Snow hood (intake rear plate)
	KPS063A47	Snow hood (outlet)

Non-Ducted, 60 Hz, 208-230V

Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
07	7.00	—	—	—	7.00	6.90 ~ 9.30
	8.80	—	—	—	8.80	7.50 ~ 14.00
09	9.00	—	—	—	9.00	7.40 ~ 12.00
	11.30	—	—	—	11.30	7.50 ~ 18.00
12	12.00	—	—	—	12.00	7.50 ~ 16.00
	15.00	—	—	—	15.00	7.50 ~ 24.00
15	15.00	—	—	—	15.00	8.90 ~ 20.00
	18.80	—	—	—	18.80	7.70 ~ 30.00
07+07	7.00	7.00	—	—	14.00	8.90 ~ 18.70
	8.75	8.75	—	—	17.50	7.70 ~ 28.00
07+09	7.00	9.00	—	—	16.00	8.90 ~ 21.30
	8.23	10.58	—	—	18.80	7.70 ~ 32.00
07+12	6.63	11.37	—	—	18.00	9.00 ~ 24.00
	6.96	11.94	—	—	18.90	7.70 ~ 35.90
07+15	5.73	12.27	—	—	18.00	10.00 ~ 24.00
	6.01	12.89	—	—	18.90	7.80 ~ 36.00
09+09	9.00	9.00	—	—	18.00	9.00 ~ 24.00
	9.45	9.45	—	—	18.90	7.70 ~ 36.00
09+12	7.71	10.29	—	—	18.00	9.10 ~ 24.00
	8.10	10.80	—	—	18.90	7.80 ~ 36.00
09+15	6.75	11.25	—	—	18.00	10.10 ~ 24.00
	7.09	11.81	—	—	18.90	7.80 ~ 36.00
12+12	9.00	9.00	—	—	18.00	9.20 ~ 24.00
	9.45	9.45	—	—	18.90	7.80 ~ 36.00

Ducted, 60 Hz, 208-230V

Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
09	9.00	—	—	—	9.00	7.30 ~ 9.10
	10.70	—	—	—	10.70	7.40 ~ 12.50
12	12.00	—	—	—	12.00	7.30 ~ 12.10
	14.30	—	—	—	14.30	7.40 ~ 16.70
15	15.00	—	—	—	15.00	8.10 ~ 16.60
	16.60	—	—	—	16.60	7.50 ~ 20.80
09+09	9.00	9.00	—	—	18.00	8.80 ~ 21.00
	9.45	9.45	—	—	18.90	7.60 ~ 25.00
09+12	7.71	10.28	—	—	18.00	8.80 ~ 21.00
	8.10	10.79	—	—	18.90	7.60 ~ 28.00
09+15	6.75	11.25	—	—	18.00	11.70 ~ 21.00
	7.09	11.81	—	—	18.90	7.70 ~ 31.00
12+12	9.00	9.00	—	—	18.00	8.80 ~ 21.00
	9.45	9.45	—	—	18.90	7.60 ~ 31.00

Job Name:	
Tag#	



Submittal Data Sheet

3MXL24QM VJU

3 Port, 2-Ton Outdoor Heat Pump



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Outdoor Specifications

Compressor	Hermetically Sealed Swing Type			
Refrigerant	R-410A			
Refrigerant Oil	PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating	
	H	2,094	H	1,886
	M	2,094	M	1,780
	L	1,977	L	1,006
Sound Power Level (dBA)	52 / 54			
Dimensions (H x W x D) (in)	28-15/16 x 34-1/4 x 12-5/8			
Weight (Lbs)	140			

Efficiency

	SEER	EER	HSPF
Non-Ducted	17.9	12.7	12.5
Ducted	14	9.9	8.2
Mixed	15.95	11.3	10.35

Performance

Cooling (Btu/hr)

Rated (Min/Max)	24,000
Operating Range	14°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

Heating (Btu/hr)

Rated	24,000
Operating Range	-13°F – 60°F

Rated Heating Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 47°F DB/43°F WB

Electrical

	208/60/1	230/60/1
System MCA	19.5	19.5
System MFA	20	20
Compressor RLA	17.5	17.5
Outdoor fan motor FLA	.38	.38
Outdoor fan motor W	58	58

MFA: Max. fuse amps **MCA:** Min. circuit amps (A) **FLA:** Full load amps (A)
RLA: Rated load amps (A) **W:** Fan motor rated output (W)

Piping

Liquid (in)	¼ x 3
Gas (in)	3/8 x 1, ½ x 2
Drain (in)	5/8
Max. Interunit Piping Length (ft)	230
Max. Interunit Height Difference (ft)	49.25
Chargeless (ft)	131.2
Additional Charge of Refrigerant (oz/ft)	.21



Page 2 of 6

Included	Part Number	Description
	DACA-WB-3	Mounting Bracket
	KEH063A4E	Drain Pan Heater 2/3/4MXS & 2/3MXL
	KPW063A4	Air Adjustment Grille
	KKG063A42	Back protection wire net
	KKG063A43	Side protection wire net
	KPS063A41	Snow hood (intake side plate)
	KPS063A44	Snow hood (intake rear plate)
	KPS063A47	Snow hood (outlet)

Non- Ducted, 60 Hz, 208-230V

Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
07	7.00	—	—	—	7.00	6.90 ~ 9.30
	8.80	—	—	—	8.80	7.50 ~ 14.00
09	9.00	—	—	—	9.00	7.40 ~ 12.00
	11.30	—	—	—	11.30	7.50 ~ 18.00
12	12.00	—	—	—	12.00	7.50 ~ 16.00
	15.00	—	—	—	15.00	7.50 ~ 24.00
15	15.00	—	—	—	15.00	8.90 ~ 20.00
	18.80	—	—	—	18.80	7.70 ~ 30.00
18	18.00	—	—	—	18.00	8.90 ~ 24.00
	22.50	—	—	—	22.50	7.70 ~ 36.00
07+07	7.00	7.00	—	—	14.00	8.90 ~ 18.70
	8.75	8.75	—	—	17.50	7.70 ~ 28.00
07+09	7.00	9.00	—	—	16.00	8.90 ~ 21.30
	8.75	11.25	—	—	20.00	7.70 ~ 32.00
07+12	6.96	11.94	—	—	18.90	9.00 ~ 24.90
	8.36	14.34	—	—	22.70	7.70 ~ 36.70
07+15	6.81	14.59	—	—	21.40	10.00 ~ 27.40
	7.45	15.95	—	—	23.40	7.80 ~ 38.90
07+18	6.72	17.28	—	—	24.00	10.10 ~ 30.00
	6.72	17.28	—	—	24.00	7.80 ~ 41.00
09+09	9.00	9.00	—	—	18.00	9.00 ~ 24.00
	11.25	11.25	—	—	22.50	7.70 ~ 36.00
09+12	8.83	11.77	—	—	20.60	9.10 ~ 26.60
	9.90	13.20	—	—	23.10	7.80 ~ 38.10
09+15	8.66	14.44	—	—	23.10	10.10 ~ 29.10
	8.93	14.88	—	—	23.80	7.80 ~ 40.30
09+18	8.00	16.00	—	—	24.00	10.10 ~ 30.00
	8.00	16.00	—	—	24.00	7.80 ~ 41.00
12+12	11.55	11.55	—	—	23.10	9.20 ~ 29.10
	11.90	11.90	—	—	23.80	7.80 ~ 40.30
12+15	10.67	13.33	—	—	24.00	10.20 ~ 30.00
	10.67	13.33	—	—	24.00	7.90 ~ 41.00
12+18	9.60	14.40	—	—	24.00	10.20 ~ 30.00
	9.60	14.40	—	—	24.00	7.90 ~ 41.00
15+15	12.00	12.00	—	—	24.00	10.80 ~ 30.00
	12.00	12.00	—	—	24.00	7.90 ~ 41.00
15+18	10.91	13.09	—	—	24.00	10.80 ~ 30.00
	10.91	13.09	—	—	24.00	7.90 ~ 41.00
18+18	12.00	12.00	—	—	24.00	10.90 ~ 30.00
	12.00	12.00	—	—	24.00	7.90 ~ 41.00
07+07+07	6.87	6.87	6.87	—	20.60	10.00 ~ 26.60
	7.70	7.70	7.70	—	23.10	7.90 ~ 38.10
07+07+09	6.79	6.79	8.73	—	22.30	10.10 ~ 28.30
	7.18	7.18	9.23	—	23.60	7.90 ~ 39.60
07+07+12	6.46	6.46	11.07	—	24.00	10.10 ~ 30.00
	6.46	6.46	11.08	—	24.00	7.90 ~ 41.00
07+07+15	5.79	5.79	12.41	—	24.00	10.80 ~ 30.00
	5.79	5.79	12.40	—	24.00	7.90 ~ 41.00
07+07+18	5.25	5.25	13.50	—	24.00	10.80 ~ 30.00
	5.25	5.25	13.50	—	24.00	7.90 ~ 41.00
07+09+09	6.72	8.64	8.64	—	24.00	10.10 ~ 30.00
	6.71	8.64	8.64	—	24.00	7.90 ~ 41.00
07+09+12	6.00	7.71	10.28	—	24.00	10.20 ~ 30.00
	6.00	7.71	10.29	—	24.00	7.90 ~ 41.00
07+09+15	5.42	6.97	11.61	—	24.00	10.90 ~ 30.00
	5.42	6.97	11.61	—	24.00	7.90 ~ 41.00
07+09+18	4.94	6.35	12.71	—	24.00	10.90 ~ 30.00
	4.94	6.35	12.71	—	24.00	7.90 ~ 41.00

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

3MXL24QM VJU Capacity Tables



Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
07+12+12	5.42	9.29	9.29	—	24.00	10.30 ~ 30.00
	5.43	9.29	9.29	—	24.00	7.90 ~ 41.00
07+12+15	4.94	8.47	10.59	—	24.00	10.90 ~ 30.00
	4.94	8.47	10.58	—	24.00	7.90 ~ 41.00
07+12+18	4.54	7.78	11.68	—	24.00	10.90 ~ 30.00
	4.54	7.78	11.68	—	24.00	7.90 ~ 41.00
07+15+15	4.55	9.73	9.73	—	24.00	11.20 ~ 30.00
	4.53	9.73	9.73	—	24.00	7.90 ~ 40.80
09+09+09	8.00	8.00	8.00	—	24.00	10.20 ~ 30.00
	8.00	8.00	8.00	—	24.00	7.90 ~ 41.00
09+09+12	7.20	7.20	9.61	—	24.00	10.30 ~ 30.00
	7.20	7.20	9.60	—	24.00	7.90 ~ 41.00
09+09+15	6.55	6.55	10.91	—	24.00	10.90 ~ 30.00
	6.55	6.55	10.90	—	24.00	7.90 ~ 41.00
09+09+18	6.00	6.00	12.01	—	24.00	10.90 ~ 30.00
	6.00	6.00	11.99	—	24.00	7.90 ~ 41.00
09+12+12	6.55	8.73	8.73	—	24.00	10.30 ~ 30.00
	6.54	8.73	8.73	—	24.00	7.90 ~ 41.00
09+12+15	6.00	8.00	10.00	—	24.00	10.90 ~ 30.00
	6.00	8.00	10.00	—	24.00	7.90 ~ 41.00
09+12+18	5.54	7.38	11.08	—	24.00	10.90 ~ 30.00
	5.54	7.38	11.08	—	24.00	7.90 ~ 41.00
09+15+15	5.54	9.23	9.23	—	24.00	11.20 ~ 30.00
	5.54	9.23	9.23	—	24.00	7.90 ~ 40.40
12+12+12	8.00	8.00	8.00	—	24.00	10.40 ~ 30.00
	8.00	8.00	8.00	—	24.00	7.90 ~ 41.00
12+12+15	7.38	7.38	9.24	—	24.00	11.00 ~ 30.00
	7.38	7.38	9.23	—	24.00	7.90 ~ 40.80

Ducted, 60 Hz, 208-230V

Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
09	9.00	—	—	—	9.00	7.30 ~ 10.50
	11.30	—	—	—	11.30	7.40 ~ 12.50
12	12.00	—	—	—	12.00	7.30 ~ 14.00
	15.00	—	—	—	15.00	7.40 ~ 16.70
15	15.00	—	—	—	15.00	8.10 ~ 17.50
	18.80	—	—	—	18.80	7.50 ~ 20.80
18	18.00	—	—	—	18.00	8.10 ~ 21.00
	18.80	—	—	—	18.80	7.50 ~ 25.00
09+09	9.00	9.00	—	—	18.00	8.80 ~ 21.00
	11.05	11.05	—	—	22.10	7.60 ~ 25.00
09+12	8.48	11.31	—	—	19.80	8.80 ~ 23.00
	9.90	13.19	—	—	23.10	7.60 ~ 28.70
09+15	8.10	13.50	—	—	21.60	9.40 ~ 25.00
	8.93	14.88	—	—	23.80	7.70 ~ 32.30
09+18	7.80	15.60	—	—	23.40	9.40 ~ 27.00
	8.00	16.00	—	—	24.00	7.70 ~ 36.00
12+12	10.80	10.80	—	—	21.60	8.80 ~ 25.00
	11.90	11.90	—	—	23.80	7.60 ~ 32.30
12+15	10.40	13.00	—	—	23.40	9.40 ~ 27.00
	10.67	13.33	—	—	24.00	7.70 ~ 36.00
12+18	9.60	14.40	—	—	24.00	9.40 ~ 27.00
	9.60	14.40	—	—	24.00	7.70 ~ 36.00
15+15	12.00	12.00	—	—	24.00	9.90 ~ 27.00
	12.00	12.00	—	—	24.00	7.70 ~ 36.00
15+18	10.91	13.09	—	—	24.00	9.90 ~ 27.00
	10.91	13.09	—	—	24.00	7.70 ~ 36.00
18+18	12.00	12.00	—	—	24.00	9.90 ~ 27.00
	12.00	12.00	—	—	24.00	7.70 ~ 36.00
09+09+09	7.80	7.80	7.80	—	23.40	9.90 ~ 27.00
	8.00	8.00	8.00	—	24.00	7.80 ~ 36.00
09+09+12	7.20	7.20	9.60	—	24.00	9.90 ~ 27.00
	7.20	7.20	9.59	—	24.00	7.80 ~ 36.00
09+09+15	6.55	6.55	10.91	—	24.00	10.40 ~ 27.00
	6.55	6.55	10.91	—	24.00	7.80 ~ 36.00
09+09+18	6.00	6.00	12.01	—	24.00	10.40 ~ 27.00
	6.00	6.00	12.00	—	24.00	7.80 ~ 36.00
09+12+12	6.55	8.73	8.73	—	24.00	9.90 ~ 27.00
	6.56	8.73	8.73	—	24.00	7.80 ~ 36.00
09+12+15	6.00	8.00	10.00	—	24.00	10.40 ~ 27.00
	6.00	8.00	10.00	—	24.00	7.80 ~ 36.00
09+12+18	5.54	7.38	11.08	—	24.00	10.40 ~ 27.00
	5.54	7.38	11.08	—	24.00	7.80 ~ 36.00
09+15+15	5.54	9.23	9.23	—	24.00	10.70 ~ 27.00
	5.54	9.23	9.23	—	24.00	7.80 ~ 36.00
12+12+12	8.00	8.00	8.00	—	24.00	9.90 ~ 27.00
	8.00	8.00	8.00	—	24.00	7.80 ~ 36.00
12+12+15	7.38	7.38	9.23	—	24.00	10.40 ~ 27.00
	7.38	7.38	9.23	—	24.00	7.80 ~ 36.00

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Job Name:	
Tag#	



Submittal Data Sheet

4MXL36TVJU

4 Port, 3-Ton Outdoor Heat Pump



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Outdoor Specifications

Compressor	Hermetically Sealed Swing Type			
Refrigerant	R-410A			
Factory Charge (Lbs)	8.60			
Refrigerant Oil	PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating	
	H	3,684	H	3,356
	M	3,029	M	3,138
	L	2,756	L	1,500
Sound Pressure Level (dBA)	53 / 55			
Dimensions (H x W x D) (in)	34-1/4 x 43-5/16 x 18-1/8			
Weight (Lbs)	214			

Efficiency

	SEER	EER	HSPF	COP
Non-Ducted	21.7	12.5	11.2	4.26
Ducted	16.9	11.0	9.1	3.5
Mixed	19.3	11.75	10.15	3.88

Performance

Cooling (Btu/hr)

Rated (Min/Max)	34,400
Operating Range	14°F – 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

Heating (Btu/hr)

Rated	36,600
Operating Range	-13°F – 60°F

Rated Heating Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 47°F DB/43°F WB

Electrical


	208/60/1	230/60/1
System MCA	32.5	32.5
System MFA	35	35
Compressor RLA	27	27
Outdoor fan motor FLA	1.15	1.15
Outdoor fan motor W	84	84

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)
RLA: Rated load amps (A) W: Fan motor rated output (W)

Piping

Liquid (in)	¼ x 4
Gas (in)	3/8 x 1, ½ x 2, 5/8 x 1
Drain (in)	1
Max. System Piping Length (ft)	230
Max. Interunit Piping Length (ft)	98
Max. Height Difference – IDU to ODU (ft)	49.25
Max. Height Difference – IDU to IDU (ft)	24.625
Chargeless (ft)	131.625
Additional Charge of Refrigerant (oz/ft)	.21

4MXL36TVJU Dimensional Data

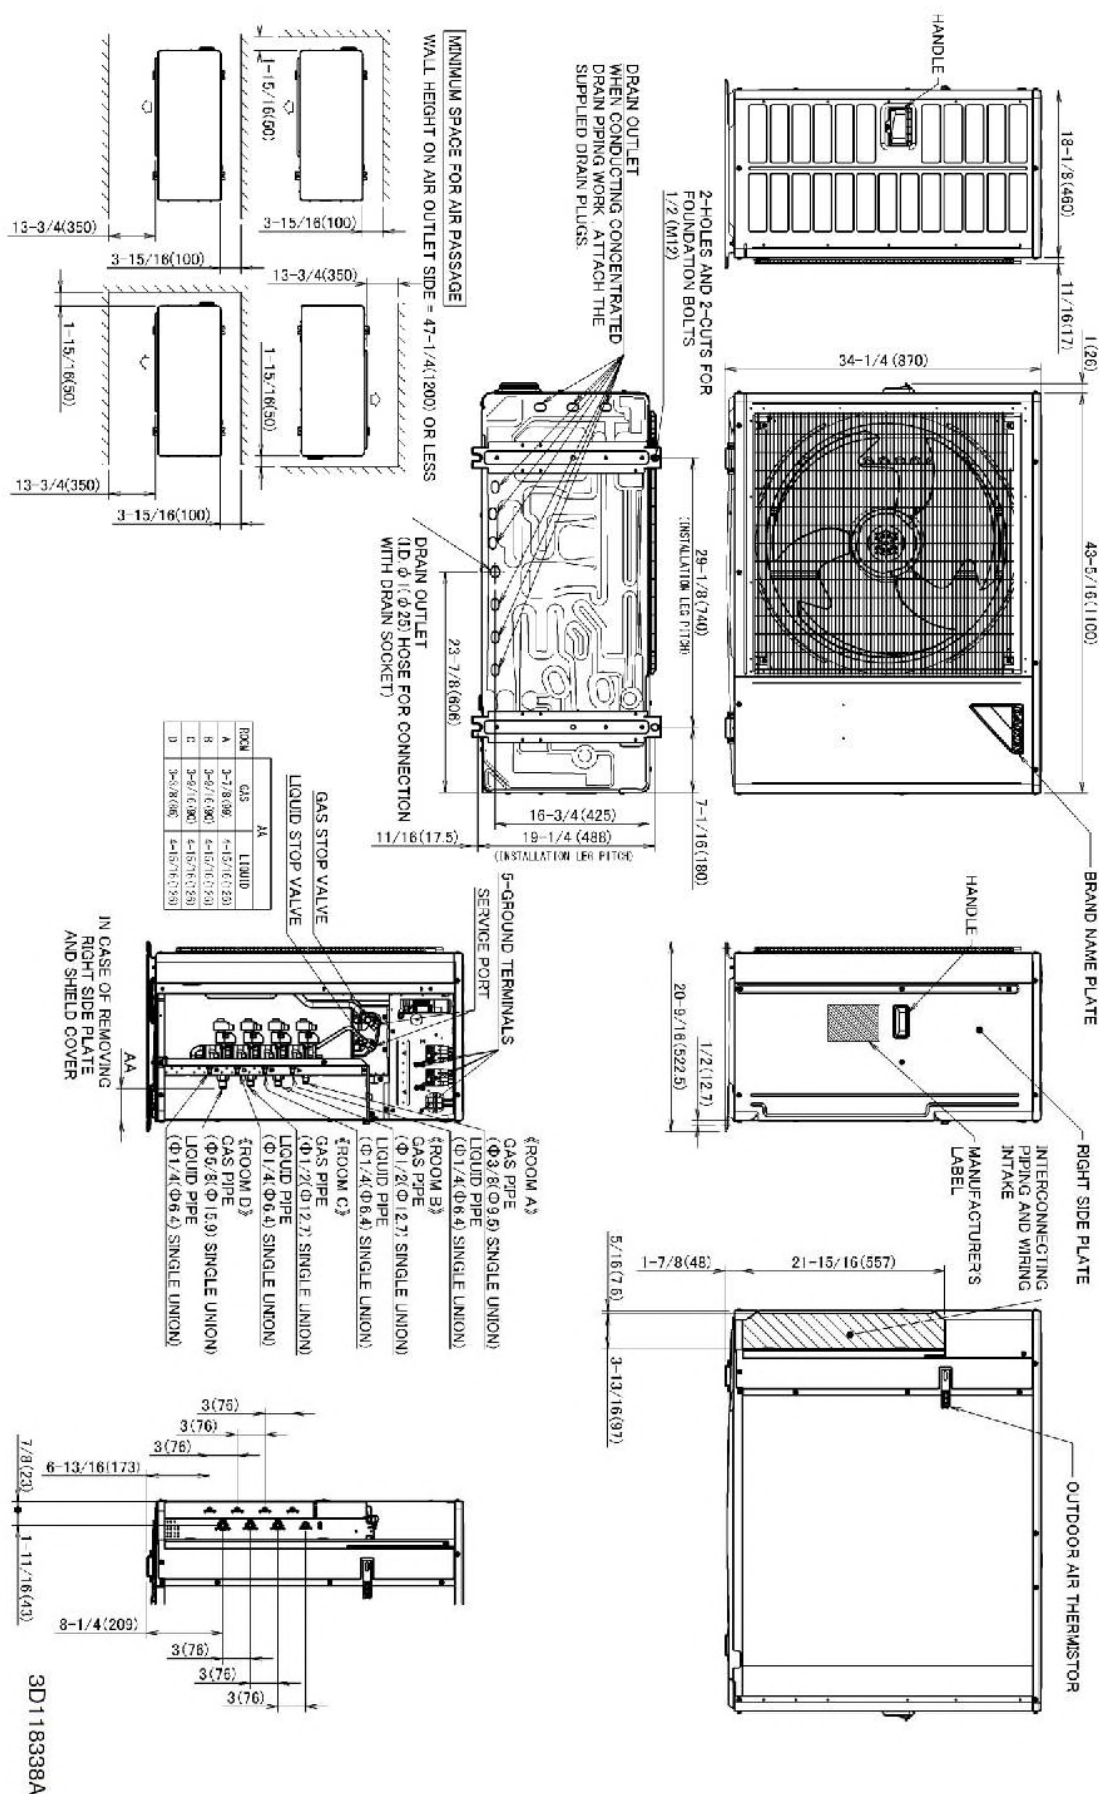

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Optional Accessories



Included	Part Number	Description
	KEH082A41	Drain Pan Heater
	KPW082A41	Air Adjustment Grille
	KKG082A41	Back protection wire net

Non- Ducted, 60 Hz, 208-230V

Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
07	7.00	—	—	—	7.00	3.30 ~ 9.30
	8.90	—	—	—	8.90	3.30 ~ 14.00
09	9.00	—	—	—	9.00	3.40 ~ 12.00
	11.50	—	—	—	11.50	3.40 ~ 18.10
12	12.00	—	—	—	12.00	4.20 ~ 16.00
	15.30	—	—	—	15.30	3.50 ~ 24.10
15	15.00	—	—	—	15.00	5.00 ~ 20.00
	19.20	—	—	—	19.20	3.60 ~ 30.10
18	18.00	—	—	—	18.00	5.00 ~ 24.00
	23.00	—	—	—	23.00	3.60 ~ 36.10
24	24.00	—	—	—	24.00	6.20 ~ 29.50
	27.40	—	—	—	27.40	4.70 ~ 42.20
07+07	7.00	7.00	—	—	14.00	5.00 ~ 18.70
	8.95	8.95	—	—	17.90	3.60 ~ 28.10
07+09	7.00	9.00	—	—	16.00	5.00 ~ 21.30
	8.93	11.48	—	—	20.40	3.60 ~ 32.10
07+12	7.00	12.00	—	—	19.00	5.00 ~ 24.90
	8.73	14.97	—	—	23.70	3.60 ~ 37.10
07+15	7.00	15.00	—	—	22.00	6.50 ~ 27.70
	8.24	17.66	—	—	25.90	4.80 ~ 40.20
07+18	7.00	18.00	—	—	25.00	7.90 ~ 30.40
	7.87	20.23	—	—	28.10	6.50 ~ 43.30
07+24	7.00	24.00	—	—	31.00	8.00 ~ 35.90
	7.32	25.08	—	—	32.40	6.50 ~ 49.40
09+09	9.00	9.00	—	—	18.00	5.00 ~ 24.00
	11.50	11.50	—	—	23.00	3.60 ~ 36.10
09+12	9.00	12.00	—	—	21.00	5.10 ~ 26.80
	10.80	14.40	—	—	25.20	3.70 ~ 39.20
09+15	9.00	15.00	—	—	24.00	7.90 ~ 29.50
	10.28	17.13	—	—	27.40	6.50 ~ 42.20
09+18	9.00	18.00	—	—	27.00	7.90 ~ 32.30
	9.83	19.67	—	—	29.50	6.50 ~ 45.30
09+24	9.00	24.00	—	—	33.00	8.00 ~ 37.80
	9.25	24.65	—	—	33.90	6.50 ~ 51.40
12+12	12.00	12.00	—	—	24.00	6.10 ~ 29.50
	13.70	13.70	—	—	27.40	4.80 ~ 42.20
12+15	12.00	15.00	—	—	27.00	7.90 ~ 32.30
	13.11	16.39	—	—	29.50	6.50 ~ 45.30
12+18	12.00	18.00	—	—	30.00	7.90 ~ 35.00
	12.68	19.02	—	—	31.70	6.50 ~ 48.40
12+24	11.47	22.93	—	—	34.40	8.10 ~ 40.50
	12.20	24.40	—	—	36.60	6.50 ~ 54.50
15+15	15.00	15.00	—	—	30.00	8.20 ~ 35.00
	15.85	15.85	—	—	31.70	6.60 ~ 48.40
15+18	15.00	18.00	—	—	33.00	8.20 ~ 37.80
	15.41	18.49	—	—	33.90	6.60 ~ 51.40
15+24	13.23	21.17	—	—	34.40	8.30 ~ 40.50
	14.08	22.52	—	—	36.60	6.60 ~ 54.50
18+18	17.20	17.20	—	—	34.40	8.20 ~ 40.50
	18.30	18.30	—	—	36.60	6.60 ~ 54.50
18+24	14.74	19.66	—	—	34.40	8.30 ~ 40.50
	15.69	20.91	—	—	36.60	6.60 ~ 54.50
24+24	17.20	17.20	—	—	34.40	8.30 ~ 40.50
	18.30	18.30	—	—	36.60	6.60 ~ 54.50
07+07+07	7.00	7.00	7.00	—	21.00	5.50 ~ 26.80
	8.40	8.40	8.40	—	25.20	3.70 ~ 39.20
07+07+09	7.00	7.00	9.00	—	23.00	6.50 ~ 28.60
	8.10	8.10	10.41	—	26.60	4.90 ~ 41.20
07+07+12	7.00	7.00	12.00	—	26.00	7.90 ~ 31.30
	7.75	7.75	13.29	—	28.80	6.50 ~ 44.30
07+07+15	7.00	7.00	15.00	—	29.00	8.20 ~ 34.10
	7.48	7.48	16.03	—	31.00	6.60 ~ 47.30
07+07+18	7.00	7.00	18.00	—	32.00	8.20 ~ 36.80
	7.26	7.26	18.68	—	33.20	6.60 ~ 50.40
07+07+24	6.34	6.34	21.73	—	34.40	8.30 ~ 40.50
	6.74	6.74	23.12	—	36.60	6.60 ~ 54.50
07+09+09	7.00	9.00	9.00	—	25.00	6.50 ~ 30.40
	7.87	10.12	10.12	—	28.10	4.90 ~ 43.30

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

4MXL36TVJU Capacity Tables



Combination of indoor unit	Cooling Capacity of each indoor unit				Heating Capacity of each indoor unit	
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
07+09+12	7.00	9.00	12.00	—	28.00	8.00 ~ 33.20
	7.58	9.74	12.99	—	30.30	6.50 ~ 46.30
07+09+15	7.00	9.00	15.00	—	31.00	8.20 ~ 35.90
	7.32	9.41	15.68	—	32.40	6.60 ~ 49.40
07+09+18	7.00	9.00	18.00	—	34.00	8.20 ~ 38.70
	7.12	9.16	18.32	—	34.60	6.60 ~ 52.50
07+09+24	6.02	7.74	20.64	—	34.40	8.30 ~ 40.50
	6.41	8.24	21.96	—	36.60	6.60 ~ 54.50
07+12+12	7.00	12.00	12.00	—	31.00	8.00 ~ 35.90
	7.32	12.54	12.54	—	32.40	6.50 ~ 49.40
07+12+15	7.00	12.00	15.00	—	34.00	8.20 ~ 38.70
	7.12	12.21	15.26	—	34.60	6.60 ~ 52.50
07+12+18	6.51	11.16	16.74	—	34.40	8.20 ~ 40.50
	6.92	11.87	17.81	—	36.60	6.60 ~ 54.50
07+12+24	5.60	9.60	19.20	—	34.40	8.30 ~ 40.50
	5.96	10.21	20.43	—	36.60	6.60 ~ 54.50
07+15+15	6.51	13.95	13.95	—	34.40	8.30 ~ 40.50
	6.92	14.84	14.84	—	36.60	6.70 ~ 54.50
07+15+18	6.02	12.90	15.48	—	34.40	8.30 ~ 40.50
	6.41	13.73	16.47	—	36.60	6.70 ~ 54.50
07+15+24	5.23	11.22	17.95	—	34.40	8.30 ~ 40.50
	5.57	11.93	19.10	—	36.60	6.70 ~ 54.50
07+18+18	5.60	14.40	14.40	—	34.40	8.30 ~ 40.50
	5.96	15.32	15.32	—	36.60	6.70 ~ 54.50
09+09+09	9.00	9.00	9.00	—	27.00	8.00 ~ 32.30
	9.83	9.83	9.83	—	29.50	6.50 ~ 45.30
09+09+12	9.00	9.00	12.00	—	30.00	8.00 ~ 35.00
	9.51	9.51	12.68	—	31.70	6.50 ~ 48.40
09+09+15	9.00	9.00	15.00	—	33.00	8.20 ~ 37.80
	9.25	9.25	15.41	—	33.90	6.60 ~ 51.40
09+09+18	8.60	8.60	17.20	—	34.40	8.20 ~ 40.50
	9.15	9.15	18.30	—	36.60	6.60 ~ 54.50
09+09+24	7.37	7.37	19.66	—	34.40	8.30 ~ 40.50
	7.84	7.84	20.91	—	36.60	6.60 ~ 54.50
09+12+12	9.00	12.00	12.00	—	33.00	8.00 ~ 37.80
	9.25	12.33	12.33	—	33.90	6.60 ~ 51.40
09+12+15	8.60	11.47	14.33	—	34.40	8.20 ~ 40.50
	9.15	12.20	15.25	—	36.60	6.60 ~ 54.50
09+12+18	7.94	10.58	15.88	—	34.40	8.20 ~ 40.50
	8.45	11.26	16.89	—	36.60	6.60 ~ 54.50
09+12+24	6.88	9.17	18.35	—	34.40	8.30 ~ 40.50
	7.32	9.76	19.52	—	36.60	6.60 ~ 54.50
09+15+15	7.94	13.23	13.23	—	34.40	8.30 ~ 40.50
	8.45	14.08	14.08	—	36.60	6.70 ~ 54.50
09+15+18	7.37	12.29	14.74	—	34.40	8.30 ~ 40.50
	7.84	13.07	15.69	—	36.60	6.70 ~ 54.50
09+15+24	6.45	10.75	17.20	—	34.40	8.30 ~ 40.50
	6.86	11.44	18.30	—	36.60	6.70 ~ 54.50
09+18+18	6.88	13.76	13.76	—	34.40	8.30 ~ 40.50
	7.32	14.64	14.64	—	36.60	6.70 ~ 54.50
12+12+12	11.47	11.47	11.47	—	34.40	8.00 ~ 40.50
	12.20	12.20	12.20	—	36.60	6.60 ~ 54.50
12+12+15	10.58	10.58	13.23	—	34.40	8.30 ~ 40.50
	11.26	11.26	14.08	—	36.60	6.60 ~ 54.50
12+12+18	9.83	9.83	14.74	—	34.40	8.30 ~ 40.50
	10.46	10.46	15.69	—	36.60	6.60 ~ 54.50
12+12+24	8.60	8.60	17.20	—	34.40	8.30 ~ 40.50
	9.15	9.15	18.30	—	36.60	6.60 ~ 54.50
12+15+15	9.83	12.29	12.29	—	34.40	8.30 ~ 40.50
	10.46	13.07	13.07	—	36.60	6.70 ~ 54.50
12+15+18	9.17	11.47	13.76	—	34.40	8.30 ~ 40.50
	9.76	12.20	14.64	—	36.60	6.70 ~ 54.50
12+18+18	8.60	12.90	12.90	—	34.40	8.30 ~ 40.50
	9.15	13.73	13.73	—	36.60	6.70 ~ 54.50
15+15+15	11.47	11.47	11.47	—	34.40	8.20 ~ 40.50
	12.20	12.20	12.20	—	36.60	6.70 ~ 54.50
15+15+18	10.75	10.75	12.90	—	34.40	8.20 ~ 40.50
	11.44	11.44	13.73	—	36.60	6.70 ~ 54.50

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

4MXL36TVJU Capacity Tables



Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
07+07+07+07	7.00	7.00	7.00	7.00	28.00	8.20 ~ 33.20
	7.58	7.58	7.58	7.58	30.30	6.60 ~ 46.30
07+07+07+09	7.00	7.00	7.00	9.00	30.00	8.20 ~ 35.00
	7.40	7.40	7.40	9.51	31.70	6.60 ~ 48.40
07+07+07+12	7.00	7.00	7.00	12.00	33.00	8.20 ~ 37.80
	7.19	7.19	7.19	12.33	33.90	6.60 ~ 51.40
07+07+07+15	6.69	6.69	6.69	14.33	34.40	8.30 ~ 40.50
	7.12	7.12	7.12	15.25	36.60	6.70 ~ 54.50
07+07+07+18	6.17	6.17	6.17	15.88	34.40	8.30 ~ 40.50
	6.57	6.57	6.57	16.89	36.60	6.70 ~ 54.50
07+07+07+24	5.35	5.35	5.35	18.35	34.40	8.30 ~ 40.50
	5.69	5.69	5.69	19.52	36.60	6.70 ~ 54.50
07+07+09+09	7.00	7.00	9.00	9.00	32.00	8.20 ~ 36.80
	7.26	7.26	9.34	9.34	33.20	6.60 ~ 50.40
07+07+09+12	6.88	6.88	8.85	11.79	34.40	8.20 ~ 39.60
	7.12	7.12	9.15	12.21	35.60	6.60 ~ 53.50
07+07+09+15	6.34	6.34	8.15	13.58	34.40	8.30 ~ 40.50
	6.74	6.74	8.67	14.45	36.60	6.70 ~ 54.50
07+07+09+18	5.87	5.87	7.55	15.10	34.40	8.30 ~ 40.50
	6.25	6.25	8.03	16.07	36.60	6.70 ~ 54.50
07+07+09+24	5.12	5.12	6.59	17.57	34.40	8.30 ~ 40.50
	5.45	5.45	7.01	18.69	36.60	6.70 ~ 54.50
07+07+12+12	6.34	6.34	10.86	10.86	34.40	8.30 ~ 40.50
	6.74	6.74	11.56	11.56	36.60	6.60 ~ 54.50
07+07+12+15	5.87	5.87	10.07	12.59	34.40	8.30 ~ 40.50
	6.25	6.25	10.71	13.39	36.60	6.70 ~ 54.50
07+07+12+18	5.47	5.47	9.38	14.07	34.40	8.30 ~ 40.50
	5.82	5.82	9.98	14.97	36.60	6.70 ~ 54.50
07+07+15+15	5.47	5.47	11.73	11.73	34.40	8.20 ~ 40.50
	5.82	5.82	12.48	12.48	36.60	6.70 ~ 54.50
07+07+15+18	5.12	5.12	10.98	13.17	34.40	8.20 ~ 40.50
	5.45	5.45	11.68	14.02	36.60	6.70 ~ 54.50
07+09+09+09	7.00	9.00	9.00	9.00	34.00	8.20 ~ 38.70
	7.12	9.16	9.16	9.16	34.60	6.60 ~ 52.50
07+09+09+12	6.51	8.37	8.37	11.16	34.40	8.30 ~ 40.50
	6.92	8.90	8.90	11.87	36.60	6.60 ~ 54.50
07+09+09+15	6.02	7.74	7.74	12.90	34.40	8.30 ~ 40.50
	6.41	8.24	8.24	13.73	36.60	6.70 ~ 54.50
07+09+09+18	5.60	7.20	7.20	14.40	34.40	8.30 ~ 40.50
	5.96	7.66	7.66	15.32	36.60	6.70 ~ 54.50
07+09+12+12	6.02	7.74	10.32	10.32	34.40	8.30 ~ 40.50
	6.41	8.24	10.98	10.98	36.60	6.60 ~ 54.50
07+09+12+15	5.60	7.20	9.60	12.00	34.40	8.30 ~ 40.50
	5.96	7.66	10.21	12.77	36.60	6.70 ~ 54.50
07+09+12+18	5.23	6.73	8.97	13.46	34.40	8.30 ~ 40.50
	5.57	7.16	9.55	14.32	36.60	6.70 ~ 54.50
07+09+15+15	5.23	6.73	11.22	11.22	34.40	8.20 ~ 40.50
	5.57	7.16	11.93	11.93	36.60	6.70 ~ 54.50
07+12+12+12	5.60	9.60	9.60	9.60	34.40	8.30 ~ 40.50
	5.96	10.21	10.21	10.21	36.60	6.70 ~ 54.50
07+12+12+15	5.23	8.97	8.97	11.22	34.40	8.30 ~ 40.50
	5.57	9.55	9.55	11.93	36.60	6.70 ~ 54.50
09+09+09+09	8.60	8.60	8.60	8.60	34.40	8.30 ~ 40.50
	9.15	9.15	9.15	9.15	36.60	6.60 ~ 54.50
09+09+09+12	7.94	7.94	7.94	10.58	34.40	8.30 ~ 40.50
	8.45	8.45	8.45	11.26	36.60	6.60 ~ 54.50
09+09+09+15	7.37	7.37	7.37	12.29	34.40	8.30 ~ 40.50
	7.84	7.84	7.84	13.07	36.60	6.70 ~ 54.50
09+09+09+18	6.88	6.88	6.88	13.76	34.40	8.30 ~ 40.50
	7.32	7.32	7.32	14.64	36.60	6.70 ~ 54.50
09+09+12+12	7.37	7.37	9.83	9.83	34.40	8.30 ~ 40.50
	7.84	7.84	10.46	10.46	36.60	6.70 ~ 54.50
09+09+12+15	6.88	6.88	9.17	11.47	34.40	8.30 ~ 40.50
	7.32	7.32	9.76	12.20	36.60	6.70 ~ 54.50
09+09+12+18	6.45	6.45	8.60	12.90	34.40	8.30 ~ 40.50
	6.86	6.86	9.15	13.73	36.60	6.70 ~ 54.50
09+09+15+15	6.45	6.45	10.75	10.75	34.40	8.20 ~ 40.50
	6.86	6.86	11.44	11.44	36.60	6.70 ~ 54.50
09+12+12+12	6.88	9.17	9.17	9.17	34.40	8.30 ~ 40.50
	7.32	9.76	9.76	9.76	36.60	6.70 ~ 54.50
09+12+12+15	6.45	8.60	8.60	10.75	34.40	8.30 ~ 40.50
	6.86	9.15	9.15	11.44	36.60	6.70 ~ 54.50
12+12+12+12	8.60	8.60	8.60	8.60	34.40	8.30 ~ 40.50
	9.15	9.15	9.15	9.15	36.60	6.70 ~ 54.50

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Ducted, 60 Hz, 208-230V

Combination of indoor unit	Cooling Capacity of each indoor unit				Heating Capacity of each indoor unit	
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
09	9.00	—	—	—	9.00	3.40 ~ 11.00
	11.50	—	—	—	11.50	3.40 - 17.30
12	12.00	—	—	—	12.00	4.20 ~ 14.00
	15.30	—	—	—	15.30	3.50 - 23.10
15	15.00	—	—	—	15.00	4.80 ~ 17.50
	19.20	—	—	—	19.20	3.60 - 28.80
18	18.00	—	—	—	18.00	4.80 ~ 21.00
	23.00	—	—	—	23.00	3.60 - 34.60
24	24.00	—	—	—	24.00	6.00 ~ 26.70
	27.40	—	—	—	27.40	4.80 - 39.90
09+09	9.00	9.00	—	—	18.00	4.90 ~ 21.00
	11.50	11.50	—	—	23.00	3.60 - 34.60
09+12	9.00	12.00	—	—	21.00	5.00 ~ 23.80
	10.80	14.40	—	—	25.20	3.60 - 37.30
09+15	9.00	15.00	—	—	24.00	7.70 ~ 26.70
	10.28	17.13	—	—	27.40	6.50 - 39.90
09+18	9.00	18.00	—	—	27.00	7.80 ~ 29.50
	9.83	19.67	—	—	29.50	6.50 - 42.60
09+24	9.00	24.00	—	—	33.00	7.90 ~ 35.20
	9.25	24.65	—	—	33.90	6.50 - 47.90
12+12	12.00	12.00	—	—	24.00	6.00 ~ 26.70
	13.70	13.70	—	—	27.40	4.80 - 39.90
12+15	12.00	15.00	—	—	27.00	7.80 ~ 29.50
	13.11	16.39	—	—	29.50	6.50 - 42.60
12+18	12.00	18.00	—	—	30.00	7.80 ~ 32.40
	12.68	19.02	—	—	31.70	6.50 - 45.20
12+24	11.47	22.93	—	—	34.40	8.00 ~ 35.20
	11.53	23.07	—	—	34.60	6.50 - 50.50
15+15	15.00	15.00	—	—	30.00	8.10 ~ 32.40
	15.85	15.85	—	—	31.70	6.50 - 45.20
15+18	15.00	18.00	—	—	33.00	8.10 ~ 35.20
	15.41	18.49	—	—	33.90	6.60 - 47.90
15+24	13.23	21.17	—	—	34.40	8.20 ~ 35.20
	13.31	21.29	—	—	34.60	6.60 - 50.50
18+18	17.20	17.20	—	—	34.40	8.10 ~ 35.20
	17.30	17.30	—	—	34.60	6.60 - 50.50
18+24	14.74	19.66	—	—	34.40	8.20 ~ 35.20
	14.83	19.77	—	—	34.60	6.60 - 50.50
24+24	17.20	17.20	—	—	34.40	8.30 ~ 35.20
	17.30	17.30	—	—	34.60	6.60 - 50.50
09+09+09	9.00	9.00	9.00	—	27.00	7.90 ~ 29.50
	9.83	9.83	9.83	—	29.50	6.50 - 42.60
09+09+12	9.00	9.00	12.00	—	30.00	7.90 ~ 32.40
	9.51	9.51	12.68	—	31.70	6.50 - 45.20
09+09+15	9.00	9.00	15.00	—	33.00	8.10 ~ 35.20
	9.25	9.25	15.41	—	33.90	6.60 - 47.90
09+09+18	8.60	8.60	17.20	—	34.40	8.20 ~ 35.20
	8.65	8.65	17.30	—	34.60	6.60 - 50.50
09+09+24	7.37	7.37	19.66	—	34.40	8.20 ~ 35.20
	7.41	7.41	19.77	—	34.60	6.60 - 50.50
09+12+12	9.00	12.00	12.00	—	33.00	7.90 ~ 35.20
	9.25	12.33	12.33	—	33.90	6.50 - 47.90
09+12+15	8.60	11.47	14.33	—	34.40	8.10 ~ 35.20
	8.65	11.53	14.42	—	34.60	6.60 - 50.50
09+12+18	7.94	10.58	15.88	—	34.40	8.20 ~ 35.20
	7.98	10.65	15.97	—	34.60	6.60 - 50.50
09+12+24	6.88	9.17	18.35	—	34.40	8.20 ~ 35.20
	6.92	9.23	18.45	—	34.60	6.60 - 50.50
09+15+15	7.94	13.23	13.23	—	34.40	8.30 ~ 35.20
	7.98	13.31	13.31	—	34.60	6.60 - 50.50

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

4MXL36TVJU Capacity Tables



Combination of indoor unit	Cooling Capacity of each indoor unit					
	Heating Capacity of each indoor unit					
	Each Capacity				Total Indoor Unit Capacity	
	A room	B room	C room	D room	Rating	(min ~ max)
09+15+18	7.37	12.29	14.74	—	34.40	8.30 ~ 35.20
	7.41	12.36	14.83	—	34.60	6.60 - 50.50
09+15+24	6.45	10.75	17.20	—	34.40	8.30 ~ 35.20
	6.49	10.81	17.30	—	34.60	6.70 - 50.50
09+18+18	6.88	13.76	13.76	—	34.40	8.30 ~ 35.20
	6.92	13.84	13.84	—	34.60	6.70 - 50.50
12+12+12	11.47	11.47	11.47	—	34.40	7.90 ~ 35.20
	11.53	11.53	11.53	—	34.60	6.50 - 50.50
12+12+15	10.58	10.58	13.23	—	34.40	8.20 ~ 35.20
	10.65	10.65	13.31	—	34.60	6.60 - 50.50
12+12+18	9.83	9.83	14.74	—	34.40	8.20 ~ 35.20
	9.89	9.89	14.83	—	34.60	6.60 - 50.50
12+12+24	8.60	8.60	17.20	—	34.40	8.30 ~ 35.20
	8.65	8.65	17.30	—	34.60	6.60 - 50.50
12+15+15	9.83	12.29	12.29	—	34.40	8.30 ~ 35.20
	9.89	12.36	12.36	—	34.60	6.60 - 50.50
12+15+18	9.17	11.47	13.76	—	34.40	8.30 ~ 35.20
	9.23	11.53	13.84	—	34.60	6.70 - 50.50
12+18+18	8.60	12.90	12.90	—	34.40	8.30 ~ 35.20
	8.65	12.98	12.98	—	34.60	6.70 - 50.50
15+15+15	11.47	11.47	11.47	—	34.40	8.30 ~ 35.20
	11.53	11.53	11.53	—	34.60	6.70 - 50.50
15+15+18	10.75	10.75	12.90	—	34.40	8.30 ~ 35.20
	10.81	10.81	12.98	—	34.60	6.70 - 50.50
09+09+09+09	8.60	8.60	8.60	8.60	34.40	8.20 ~ 35.20
	8.65	8.65	8.65	8.65	34.60	6.60 - 50.50
09+09+09+12	7.94	7.94	7.94	10.58	34.40	8.20 ~ 35.20
	7.98	7.98	7.98	10.65	34.60	6.60 - 50.50
09+09+09+15	7.37	7.37	7.37	12.29	34.40	8.30 ~ 35.20
	7.41	7.41	7.41	12.36	34.60	6.70 - 50.50
09+09+09+18	6.88	6.88	6.88	13.76	34.40	8.30 ~ 35.20
	6.92	6.92	6.92	13.84	34.60	6.70 - 50.50
09+09+12+12	7.37	7.37	9.83	9.83	34.40	8.20 ~ 35.20
	7.41	7.41	9.89	9.89	34.60	6.60 - 50.50
09+09+12+15	6.88	6.88	9.17	11.47	34.40	8.30 ~ 35.20
	6.92	6.92	9.23	11.53	34.60	6.70 - 50.50
09+09+12+18	6.45	6.45	8.60	12.90	34.40	8.30 ~ 35.20
	6.49	6.49	8.65	12.98	34.60	6.70 - 50.50
09+09+15+15	6.45	6.45	10.75	10.75	34.40	8.30 ~ 35.20
	6.49	6.49	10.81	10.81	34.60	6.70 - 50.50
09+12+12+12	6.88	9.17	9.17	9.17	34.40	8.20 ~ 35.20
	6.92	9.23	9.23	9.23	34.60	6.60 - 50.50
09+12+12+15	6.45	8.60	8.60	10.75	34.40	8.30 ~ 35.20
	6.49	8.65	8.65	10.81	34.60	6.70 - 50.50
12+12+12+12	8.60	8.60	8.60	8.60	34.40	8.20 ~ 35.20
	8.65	8.65	8.65	8.65	34.60	6.60 - 50.50