

# NEW PRODUCT ANNOUNCEMENT

## NEW! Noritz NR981-OD Residential Models for Outdoor Installations

- BTU input range from 16,000 up to 199,900 BTUH
  - Maximum flow rate capacity of up to 9.8 GPM
  - Part of Noritz America's line of ProTough products for outdoor (-OD) installations
  - Heat exchanger manufactured with commercial grade copper, 25% thicker piping than standard models
  - Features an outdoor vent design that does not require additional venting
  - Ultra Low Nox Burner, below 20 ppm or 14 ng/joule; SCAQMD Compliant
- Product:** NR981-OD Residential Water Heater  
**Model#:** NR981-OD


## Specifications:

### Performance/Dimensions



NR981-OD

BTU Range: 199,900 to 16,000 BTUH  
 Max. Hot Water Capacity: Up to 9.8 gpm  
 Dimensions: 23.6" x 13.8" x 9.4"  
 Warranty: 12 years Heat Exchanger/5 years Parts/  
 1 year Approved Reasonable Labor

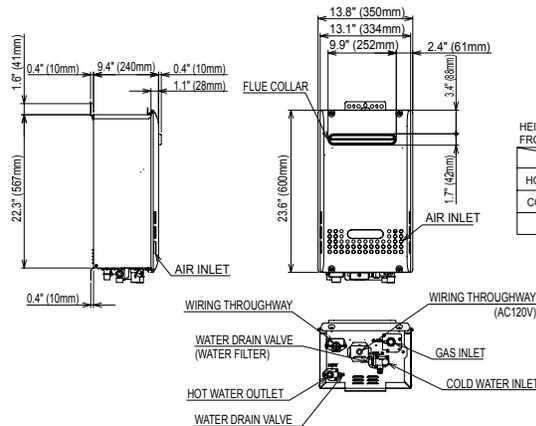

## Availability: April 16, 2012



Tankless for Professionals™

### Accessories



Quick Connect Cord (#QC-2)




Noritz Isolation Valves (#IK-WV-200)



Recess Box for OD Model (#RB-700-1)



Pipe Cover (#PC-2S)



H2Flow Anti-Scale System (#H2F)