

# NEW PRODUCT ANNOUNCEMENT

## NEW! Noritz NRC1111 Series High Efficiency Condensing Models for Indoor and Outdoor Installations

- BTU input range from 16,000 up to 199,900 BTU/h
- Maximum flow rate capacity of up to 11.1 GPM
- Part of Noritz America's line of EcoTough products for both indoor (-DV) and outdoor (-OD) installations
- Heat exchanger manufactured with commercial grade copper, 25% thicker piping than standard models
- DV models are SV-convertible with the use of the SV Conversion Kit (#SV-CK-3)

**Product:** NRC1111 Series Condensing Water Heater  
**Model#:** NRC1111-OD, NRC1111-DV

## Availability: February 23, 2012




**Tankless for Professionals™**

## Specifications:

### Performance/Dimensions



BTU Range: 199,900 to 16,000 BTU/h  
 Max. Hot Water Capacity: Up to 11.1 gpm  
 Dimensions: 24.2" x 18.3" x 9.4"  
 Warranty: 12 years Heat Exchanger/5 years Parts/  
 1 year Approved Reasonable Labor

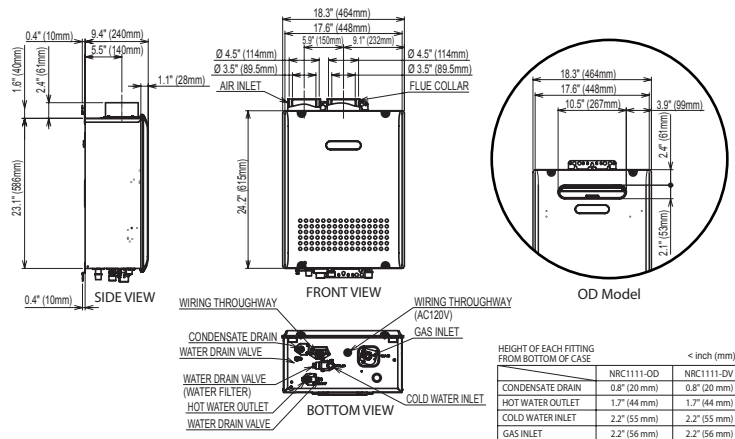

### Accessories



Quick Connect Cord (#QC-2)



Noritz Isolation Valves (#IK-WV-200)



Recess Box for OD Model (#RB-900-1)  
**Available April 2012**



External Neutralizer (#NC-1)



H2Flow Anti-Scale System (#H2F)